




特點 Feature

根據重力原理，水流通過腔體，自動分離空氣、水和雜質。從自動排氣閥排出空氣，打開底部球閥，水壓會排出雜質，水平安裝。

Using gravity theory, flow water pass through bin, automatically separate air, water and impurity. Air ejected from air release valves, Open bottom of valve, impurity will be ejected by pressure of water, Must be installed at horizontal position.

外形尺寸 Dimension

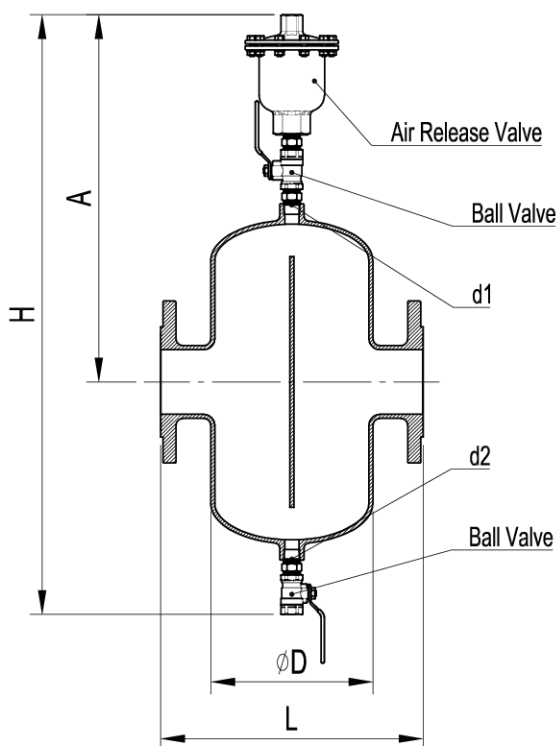

Size	A	H	D	L	d1	d2
2"	435	710	170	290	15	15
2.5"	435	710	170	290	15	15
3"	450	740	200	325	15	15
4"	470	780	260	435	15	15
5"	520	890	275	490	15	15
6"	550	930	320	540	15	15
8"	560	950	420	650	15	15
10"	590	1020	520	760	20	25
12"	675	1200	620	850	20	25
14"	675	1200	620	850	20	25
16"	900	1650	800	1200	20	25
18"	950	1750	1000	1500	20	25
20"	950	1750	1000	1500	20	25
24"	1200	2250	1200	1700	20	25

※表中的尺寸為近似值 Dimensions are approximate values.

注意 Note :

※寶閥公司保留不經事先通知及對其閥門型號、尺寸逕行更改之權利！如製作設計圖、安裝圖或施工圖等，請務必取得本公司簽署確認之 CAD 圖稿，否則如有發生錯誤情況，請恕本公司無法負責！King-Tech reserves the right to make any revisions on the valve model and size without prior notification. When making any design drawing, installation drawing or construction drawing, please do get our approved CAD with our signature, or we will not be responsible for any mistake.

閥門規格 Specification


類型 Class	10K / 150LB / PN10	16K / PN16
工作壓力 Working Pressure	10 bar	16 bar
工作溫度 Working Temperature	-10~100 °C	-10~100 °C

閥體材質 Body Material : 碳鋼 Steel / 不鏽鋼 Stainless steel

自動排氣閥材質 Air Release Valve Material : 鑄鐵 Cast iron / 不鏽鋼 Stainless steel

球閥材質 Ball Valve Material : 銅 Brass / 不鏽鋼 Stainless steel

壓力損失曲線 Pressure Loss Curve

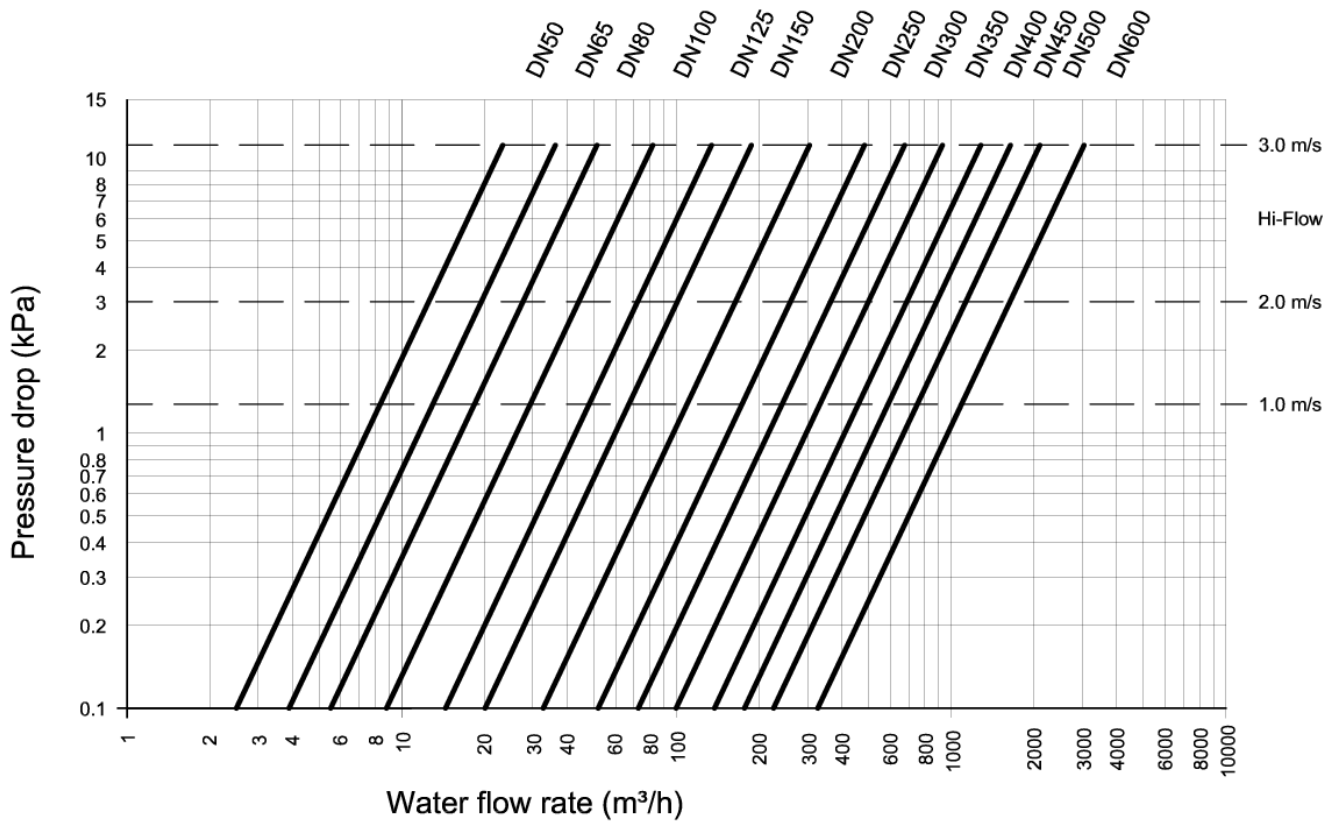

寶閥精密工業股份有限公司

King-tech Valve Precision Industry Inc.



臺北市新生北路二段 127 巷 47 號 1F

www.kingtech-sb.com

E-mail: sb.wow@msa.hinet.net



經銷商 Distributor