



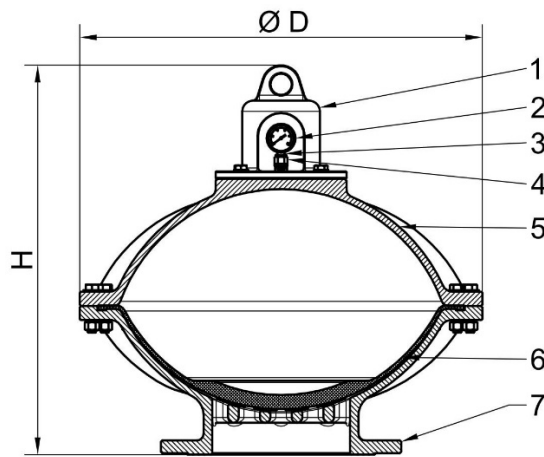

水錘吸收器 Pulsation Dampener

Model: **608N**

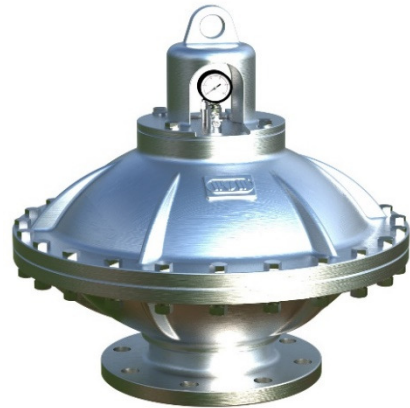

閥門規格 Specification

連接方式 Connection : 法蘭 Flange
PN10 / 16 、 JIS 10K / 16K / 20K

最大工作壓力 Max working pressure : 25 Bar

最大工作溫度 Max work temperature : 100°C / 220°C

※寶閥公司保留不經事先通知及對其閥門型號、尺寸逕行更改之權利 ! King-Tech reserves the right to make any revisions on the valve model and size without prior notification.

結構材質 Material of Construction

No.	Parts Name	Material
1	保護蓋 Protective Cover	球墨鑄鐵 Ductile Iron
2	壓力錶 Pressure Gauge	-
3	氣嘴 Charging Port	銅 Brass
4	球閥 Ball Valve	銅 Brass
5	上蓋 Cover	鑄鋼 / 不鏽鋼 Cast Steel / Stainless Steel
6	氣囊 Bladder	NBR / EPDM / VITON
7	閥體 Body	鑄鋼 / 不鏽鋼 Cast Steel / Stainless Steel

外形尺寸 Dimension

Size (DN)	H (mm)	D (mm)	容積 Capacity (L)
50*	240	180	0.7
65	355	290	3
80	355	290	3
100	425	360	6
125	425	360	6
150	500	505	17
200	565	570	30
250	565	570	30
300	565	570	30

*無保護蓋 No protective cover

寶閥精密工業股份有限公司

King-tech Valve Precision Industry Inc.



臺北市新生北路二段 127 巷 47 號 1F

www.kingtech-sb.com

E-mail: sb.wow@msa.hinet.net



經銷商 Distributor