




Pressure Sustaining, Back Valve

Model: **47-03**

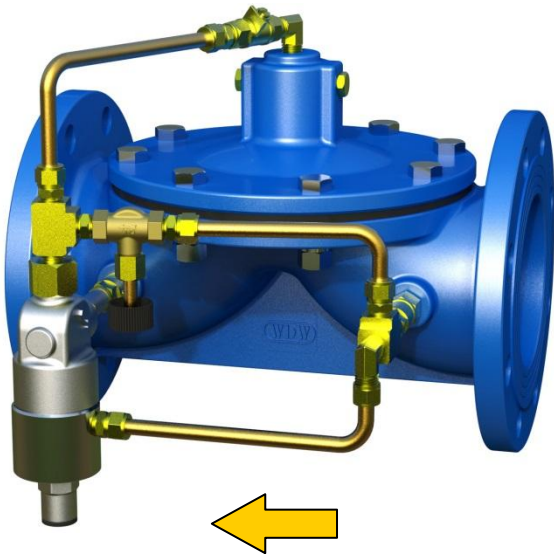


- Sensitive, accurate pressure control
- Reliable and excellent sealing
- Quickly open valve, ensure pipe pressure
- Slow shut off design and impact prevention
- Completely automatic operation

Model 47-03 pressure sustaining, back pressure valve can maintain upstream pipe pressure. It is applied for pressure sustaining, back impact problems. during operation, through pilot to sense the valve inlet pressure and control the open/close of the valve. when the input pressure is over the preset value, valve will quickly open and maintain the pressure in the pipe. After pressure relief, the valve will close slowly to prevent impact happening.

Accessories


No.	Parts Name
1	Strainer
2	Needle valve / Ball valve
3	Ball valve
4	Ball valve
5	Pilot of pressure sustaining, back
6	Ball valve
7	Basic valve body

Schematic Diagram

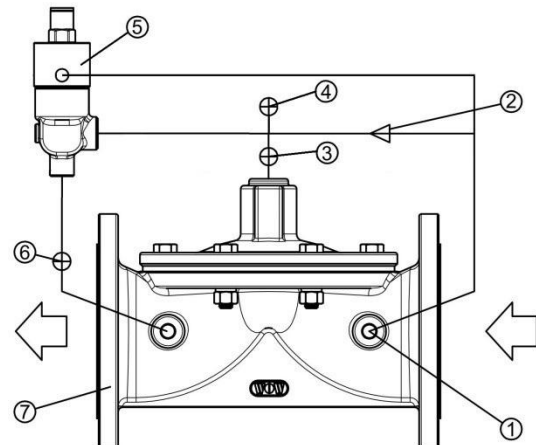


Typical Application

47-03 can be used as sustaining valve by installing it between upstream high pressure water supply and downstream big flow rate demand. It can maintain upstream supply pressure to avoid over flow rate problem which will lead upstream supply pressure loss.

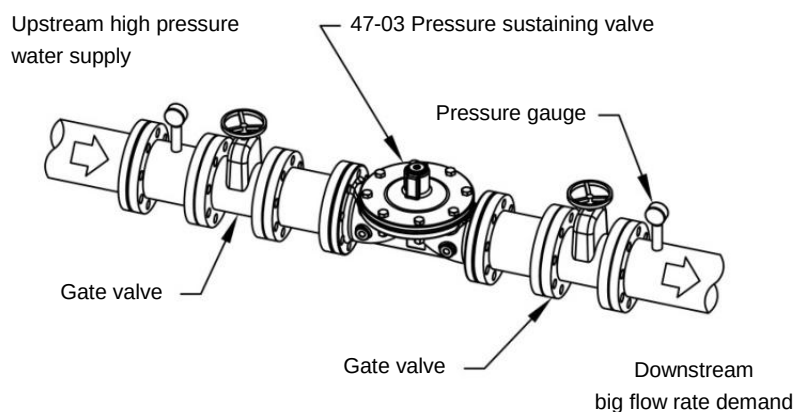

Dimension

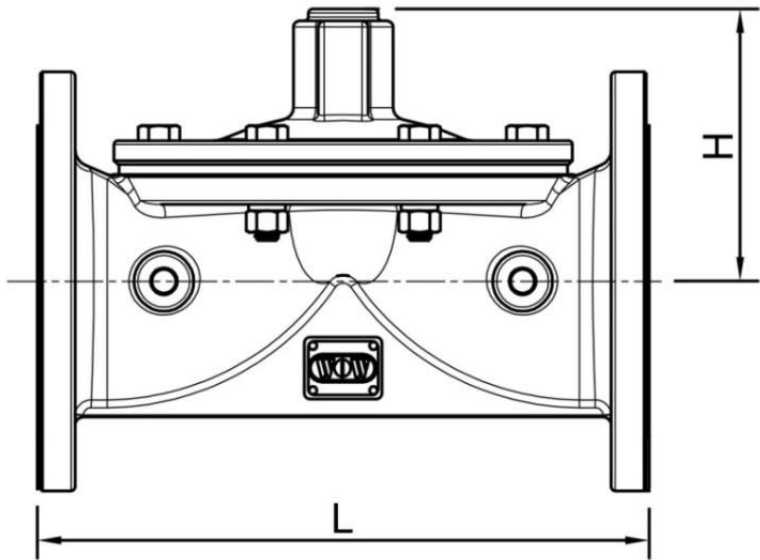

Valve size	50	65	80	100	125	150
L(mm)	200	220	285	307	370	390
H(mm)	87	109	115	137	142	164
Weight(kg)	7	9	16	18	37	48

Notice :

※When installing the valve, strongly request to leave enough space for maintenance. It is necessary to install the filter at the front section of the valve to avoid foreign materials to block the valve and affect the operation of the valve.

※King-Tech reserves the right to make any revisions on the valve model and size without prior notification.

※When making any design drawing, installation drawing or construction drawing, please do get our approved CAD with our signature, or we will not be responsible for any mistake.

Specification

Size : DN50~DN150 to flange
Flange : 10K、16K、PN16、150LB
Temp. range : 0°C~100°C、water

Material

Body : Iron casting / Stainless steel
Accessory : Brass / Stainless steel
Fastener : Carbon steel / Stainless steel
Diaphragm : NBR

Pilot Specification

Pressure adjustment range : 1~4 bar、3~9 bar
Temp. range : 0°C~100°C、water
Material : Brass / Stainless steel

When Ordering, Please Specify

- 1、Valve model number
- 2、Valve size
- 3、Pressure range
- 4、Connection type
- 5、Other optional parts
- 6、Working pressure

King-tech Valve Precision Industry Inc.



www.kingtech-sb.com
E-mail: sb.wow@msa.hinet.net
1F, No. 47, Lane 127, sect 2, North Xinsheng Road Taipei



Distributor